

ELKAY[®]

commercial
products

The **RIGIDBILT**[®] Line of Scullery Sinks...
Expanded + Redesigned




Discover the
professional's choice.[™]

Elkay has redesigned and expanded our Rigidbilt sink offering, enhancing their appeal as a value priced scullery line for applications not requiring highly-polished 14 gauge. Choose from new single, double and triple bowl models in a range of sizes ideal for a variety of food service and general commercial applications.

The Elkay **RIGIDBILT**® Scullery Sink Family Has Grown!

Model	Drainboards	Number of Bowls	Bowl Size
RNSF8118	No	1	18" x 24" x 12.75"
RNSF8118LR	Yes	1	18" x 24" x 12.75"
RNSF8124	No	1	24" x 24" x 12.75"
RNSF8124LR	Yes	1	24" x 24" x 12.75"
RNSF8236	No	2	18" x 24" x 12.75"
RNSF8236LR	Yes	2	18" x 24" x 12.75"
RNSF8248	No	2	24" x 24" x 12.75"
RNSF8248LR	Yes	2	24" x 24" x 12.75"
RNSF8354	No	3	18" x 24" x 12.75"
RNSF8354LR	Yes	3	18" x 24" x 12.75"
RNSF8372	No	3	24" x 24" x 12.75"
RNSF8372LR	Yes	3	24" x 24" x 12.75"

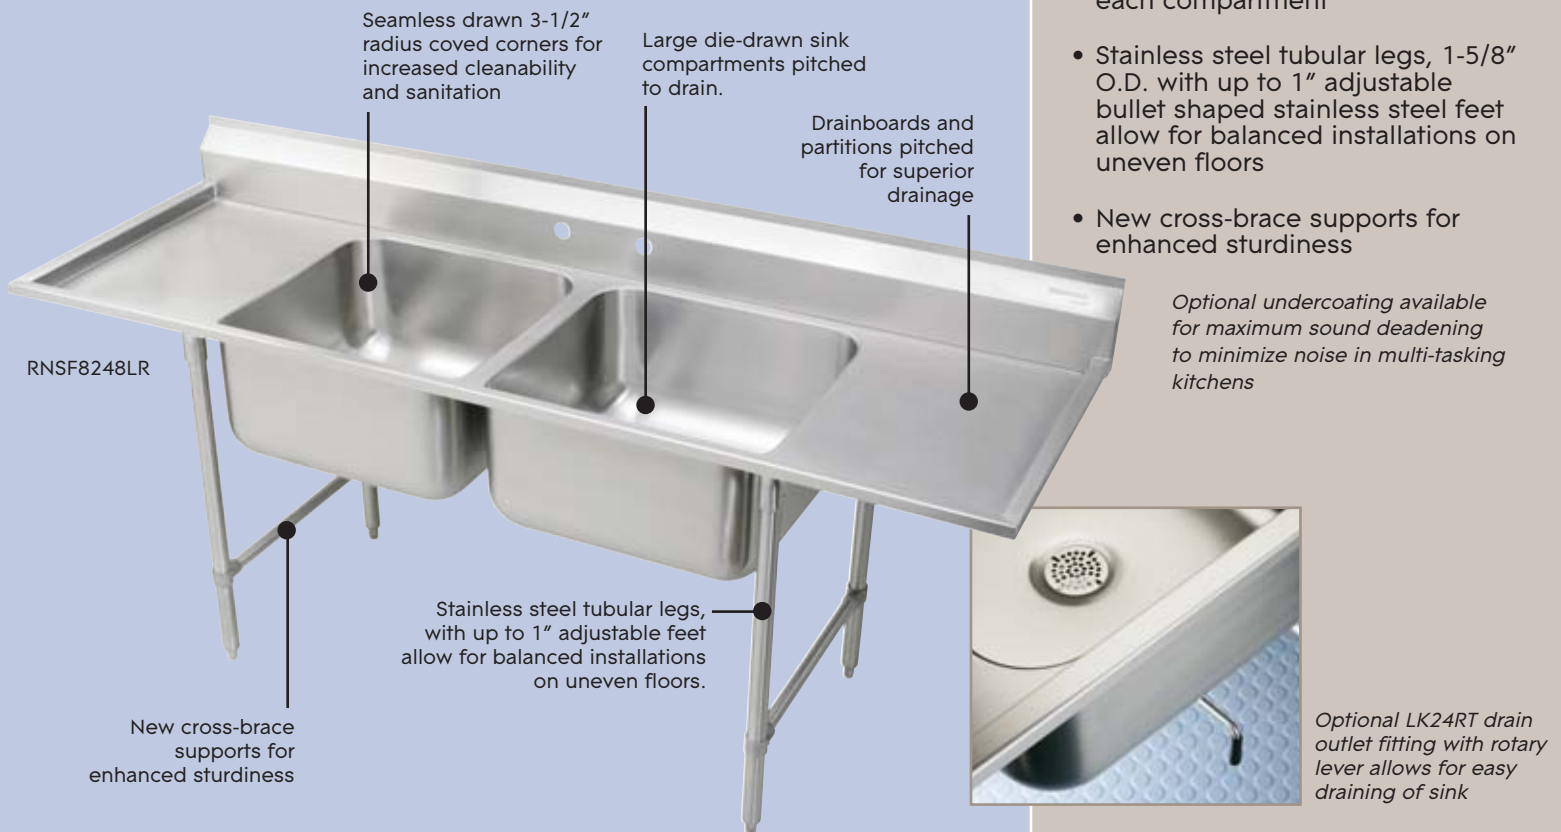

Features + Benefits

- 16 gauge Type 304 stainless steel bowls and deck
- Large die-drawn sink compartments are pitched to drain and can handle the largest dishes in the busiest kitchens
- Drainboards and partitions are pitched to provide superior drainage
- Seamless drawn 3-1/2" radius coved corners for increased cleanability and sanitation
- 8" high, full length backsplash with 45° slope top resists dirt and grime
- 2" thick backsplash allows for plumbing behind the sink
- Channel rim design with 1" apron has inward sloping rim to minimize spillage
- 3-1/2" drain opening centered in each compartment
- Stainless steel tubular legs, 1-5/8" O.D. with up to 1" adjustable bullet shaped stainless steel feet allow for balanced installations on uneven floors
- New cross-brace supports for enhanced sturdiness

Optional undercoating available for maximum sound deadening to minimize noise in multi-tasking kitchens

Optional LK24RT drain outlet fitting with rotary lever allows for easy draining of sink

NSF Carries NSF International Certification

ELKAY®

Contact Information

Web Site: elkayusa.com
 Corporate Headquarters:
 630.574.8484
 Customer Care: 630.572.3192
 Fax: 630.574.4509

2222 Camden Court
 Oak Brook, Illinois 60523

© 2009 Elkay
 Printed in U.S.A. (1/09)
 F-4303