

**Scrub-Up, Wall Mounted Sink  
With Sensor Faucet, AC / Battery Powered  
Models EWS2520SACC,  
EWS2520SACMC and EWS2520SACTMC**




**SPECIFICATIONS**

**GENERAL**

EWS2520 #14 gauge, type 304 (18-8) stainless steel scrub-up sink with 1-3/4" (44mm) radius vertical and horizontal covered corners. 1-1/2" (38mm) rolled rim. Full length 6" (152mm) high backsplash. Exposed surfaces are hand blended to a uniform satin luster finish. Underside is sound deadened. Furnished with wall hanger and stainless steel support brackets.

(CHECK MODEL SPECIFIED)

MODEL	FAUCET	DRAIN	MIXING VALVE
<input type="checkbox"/> EWS2520SACC	LKB722C	LK18B	NONE
<input type="checkbox"/> EWS2520SACMC	LKB722C	LK18B	LK724
<input type="checkbox"/> EWS2520SACTMC	LKB722C	LK18B	LK723

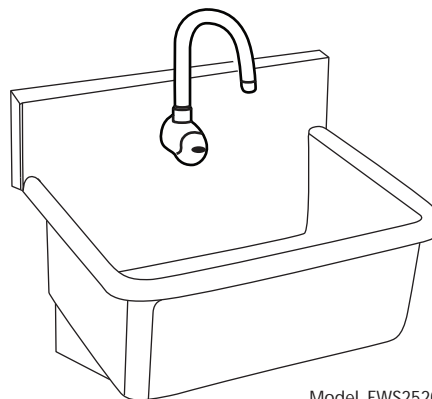

Model EWS2520SACC

LKB722C Sensor-operated, non-mixing backsplash-mounted gooseneck faucet with adjustable sensor eyes. A continuous beam is emitted from sensor. The sensor faucet is activated by user placing hands under the spout. Water will flow as long as hands remain within sensor range. When hands are removed the water stops automatically based on shut off delay settings. The sensor then resets and is ready for the next user.

Chrome-plated solid brass body construction with 2.0gpm laminar flow control on spout end. Includes water-resistant sensor control module and power cables. Features dual power options: AC plug-in and battery holder with four AA batteries. Slow-closing piston operated solenoid valve, in-line filter with clean-out trap and flexible supply hose.

Control circuit is solid state, has adjustable sensor range of 7/8" (22mm) to 6-3/4" (171mm), shut-off delay preset to 1 second and field adjustable to 2 seconds (to prevent sink overflow).


LK18B Stainless steel perforated grid strainer with 1-1/2" (38mm) O.D. stainless steel tailpiece.

LK723 Anti-scald thermostatic mixing valve with nickel-plated brass body 1/2" (13mm) SWT inlets and outlet connections, check valves on inlets and a mixed temperature range of 80°- 120°F. Certified under ASSE1016.

LK724 Mechanical mixing valve with C.P. brass body, 3/8" (10mm) compression inlets and outlet connections, and check valves on inlets.

**DIMENSIONS**

Model Number	A		B		C		D		E		F		G		H		I		J		K		L	
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
EWS2520	25	635	19 1/2	495	22	559	16	406	1 1/2	38	12 1/2	318	7	178	6	152	10 1/2	267	7/16	11	2 5/8	67	17	432

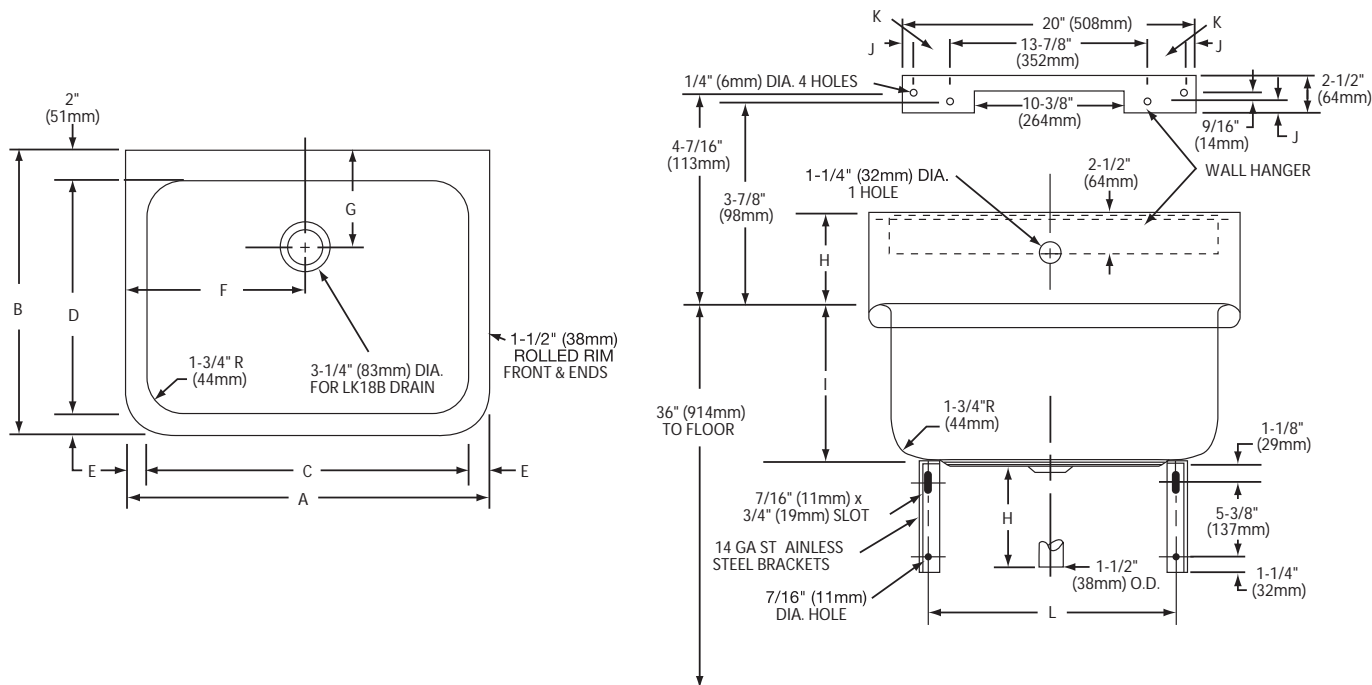

**ROUGH-IN DIMENSIONS**

