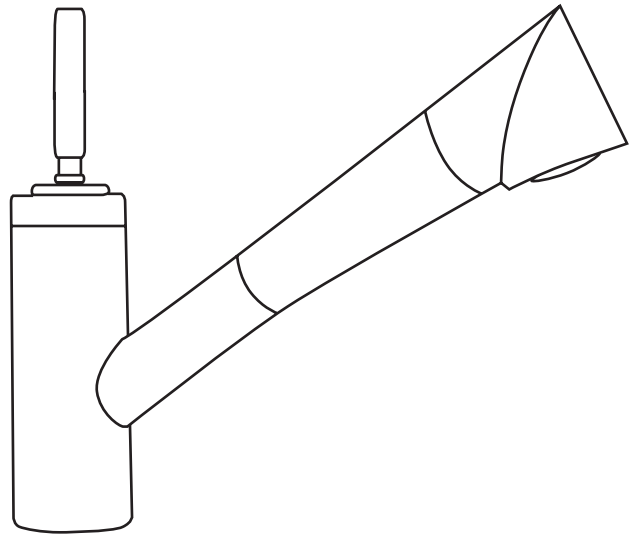


**Arezzo® Single Handle Kitchen Faucet
Model LK7220****FEATURES**


- Single hole top mount installation
 - 1-1/2" (38mm) diameter faucet hole required
 - Maximum countertop thickness 1-1/2" (38mm)
- 180° swing spout with spray and stream pull-out spray
- Single lever faucet with solid brass construction
- Removable ceramic disc cartridge
- Flexible supply tubes with 1/2" (13mm) male I.P.S. adapters
- Available in the following colors & finishes
 - Chrome LK7220CR
 - Brushed nickel LK7220NK
 - Brushed chrome LK7220BC
- Ship Wt. 5.5 lbs. (2.5Kg)
- Due to the weight of this faucet, Elkay recommends that it be installed to an 18" (457mm) gauge stainless steel sink (or heavier) or to a solid surface countertop
- Maximum flow rate
 - 2.5 GPM/9.5 L/min at 80 P.S.I.G
 - 2.5 GPM/8.3 L/min at 60 P.S.I.G

**WARRANTY**

- Limited Lifetime


COMPLIES WITH:

- ADA
- ANSI/NSF61-CERTIFIED
- ASME A112.18.1-05/CSA B125.1-2005-CERTIFIED
- CA AB1953/VT S152
- cUPC-CERTIFIED
- UPC-CERTIFIED

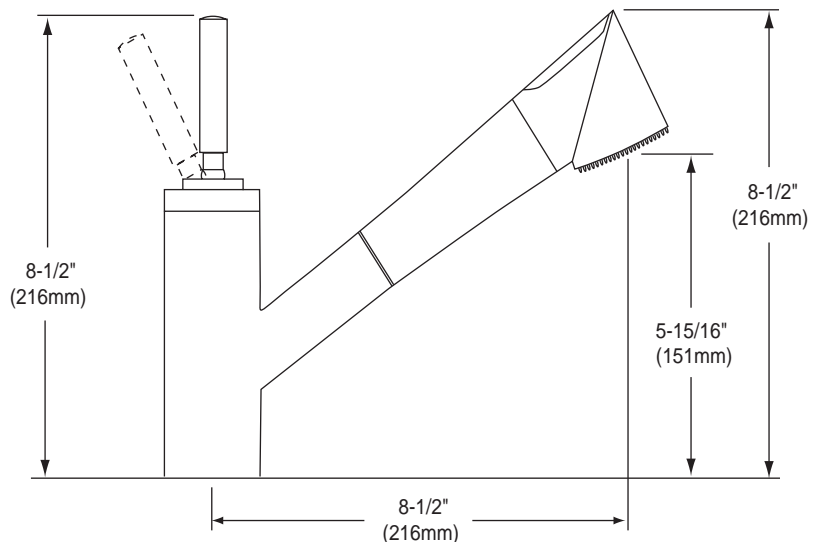

SEE OTHER SIDE FOR REPLACEMENT PARTS

Arezzo® Single Handle Kitchen Faucet Model LK7220

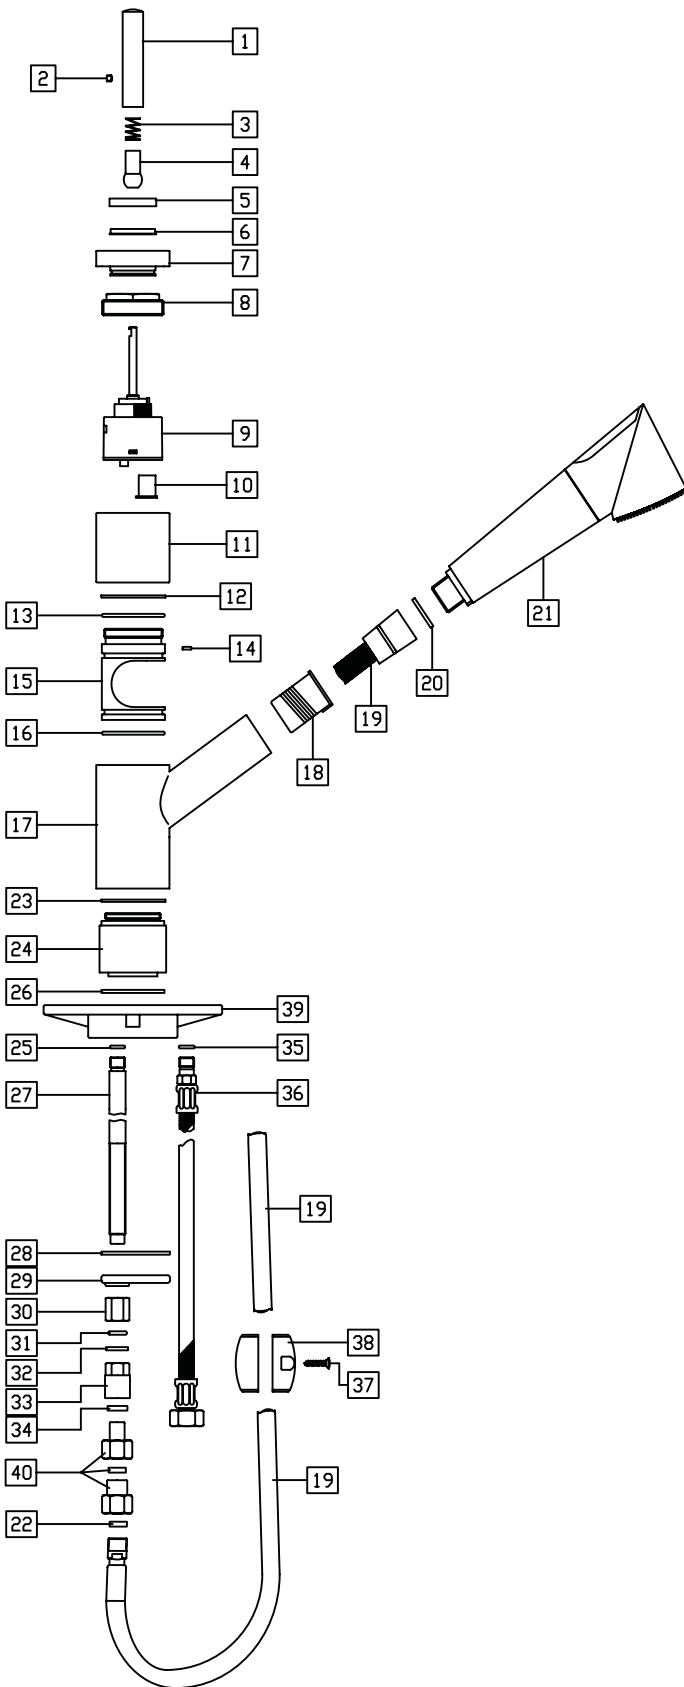

ITEM	PART	DESCRIPTION
1		
2		
3	A55952R - CHROME	LEVER HANDLE ASSEMBLY
4	A55953R - BRUSHED NICKEL	
5	A55954R - BRUSHED CHROME	
6		
7		
8	P29241	CARTRIDGE NUT
9	A56102R	CARTRIDGE
10	A56117R	GREEN WASHER
11		
12		
13		
14	N/A	N/A
15		
16		
17		
18		
19	A56118R	FLEXIBLE HOSE
20		
21	A56110R - CHROME A56125R - BRUSHED NICKEL A56126R - BRUSHED CHROME	HANDSHOWER ASSEMBLY (ALSO INCLUDES FLEX HOSE)
22		
23		
24	N/A	N/A
25		
26		
27		
28		
29		
30	A56024R	HARDWARE
31		
32		
33		
34		
35	A56097R	SUPPLY HOSES (1 PAIR, 1 RED & 1 BLUE)
36		
37		
38	N/A	N/A
39		
40	A56030R	CHECK VALVE