

Moda™ Single Handle Kitchen Faucet Model LK7522

FEATURES



- Single hole single lever top mount faucet
 - 1-1/2" (38mm) diameter faucet hole required
 - Maximum countertop thickness 1-1/2" (38mm)
- Single lever faucet with solid brass construction
- 360° swing spout
- Removable ceramic disc cartridge
- Flexible braided stainless steel supply tubes with 1/2" (13mm) male I.P.S. adapters.
- Available in the following finishes:
 - Chrome LK7522CR
 - Brushed nickel LK7522NK
 - Brushed chrome LK7522BC
- Maximum flow rate
 - 2.5 GPM/9.5 L/min at 80 P.S.I.G.
 - 2.2 GPM/8.3 L/min at 60 P.S.I.G.
- Ship Wt. 5 lbs. (2.3Kg)
- Due to the weight of this faucet, Elkay recommends that it be installed to an 18" (1.2mm) gauge stainless steel sink (or heavier) or to a solid surface countertop

WARRANTY

- Limited Lifetime


COMPLIES WITH:

- ADA
- ANSI/NSF61-CERTIFIED
- ASME A112.18.1-05/CSA B125.1-2005-CERTIFIED
- CA AB1953/VT S152
- cUPC-CERTIFIED
- UPC-CERTIFIED

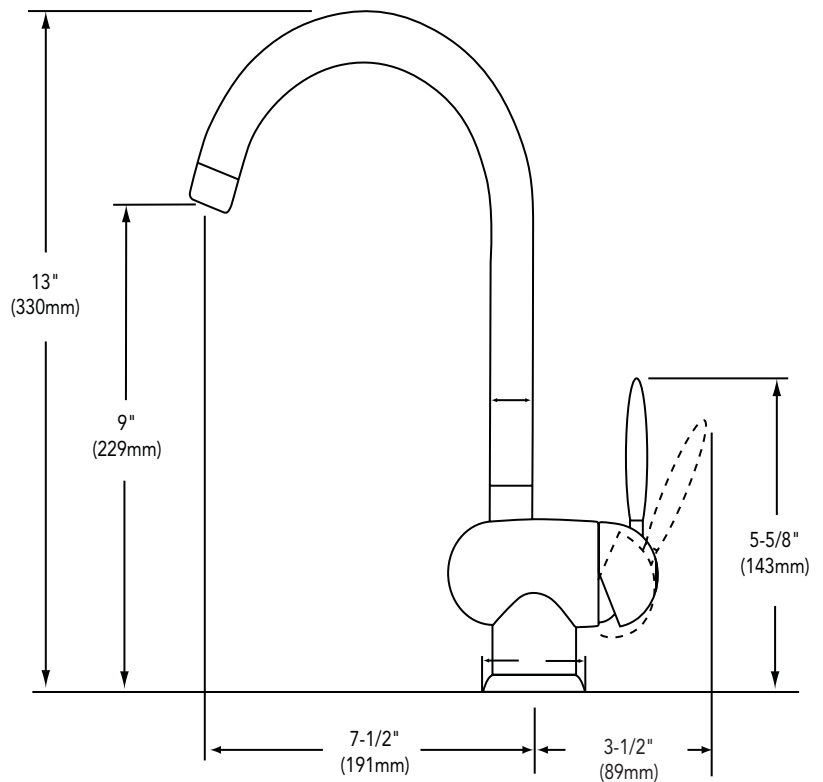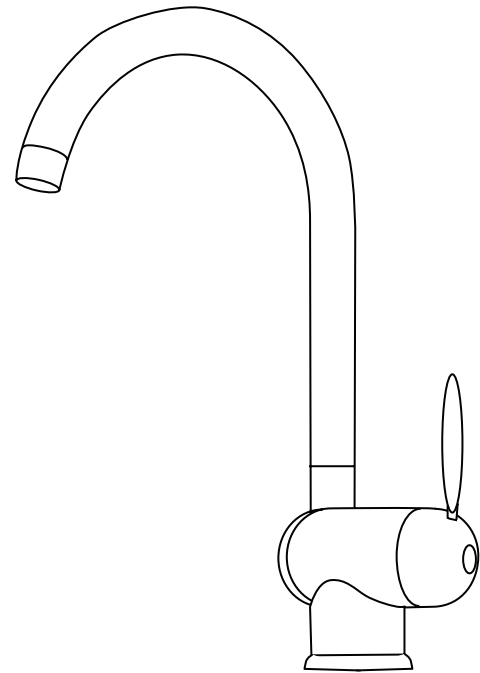

SEE OTHER SIDE FOR REPLACEMENT PARTS

**Moda™ Single Handle Kitchen Faucet
Model LK7522**

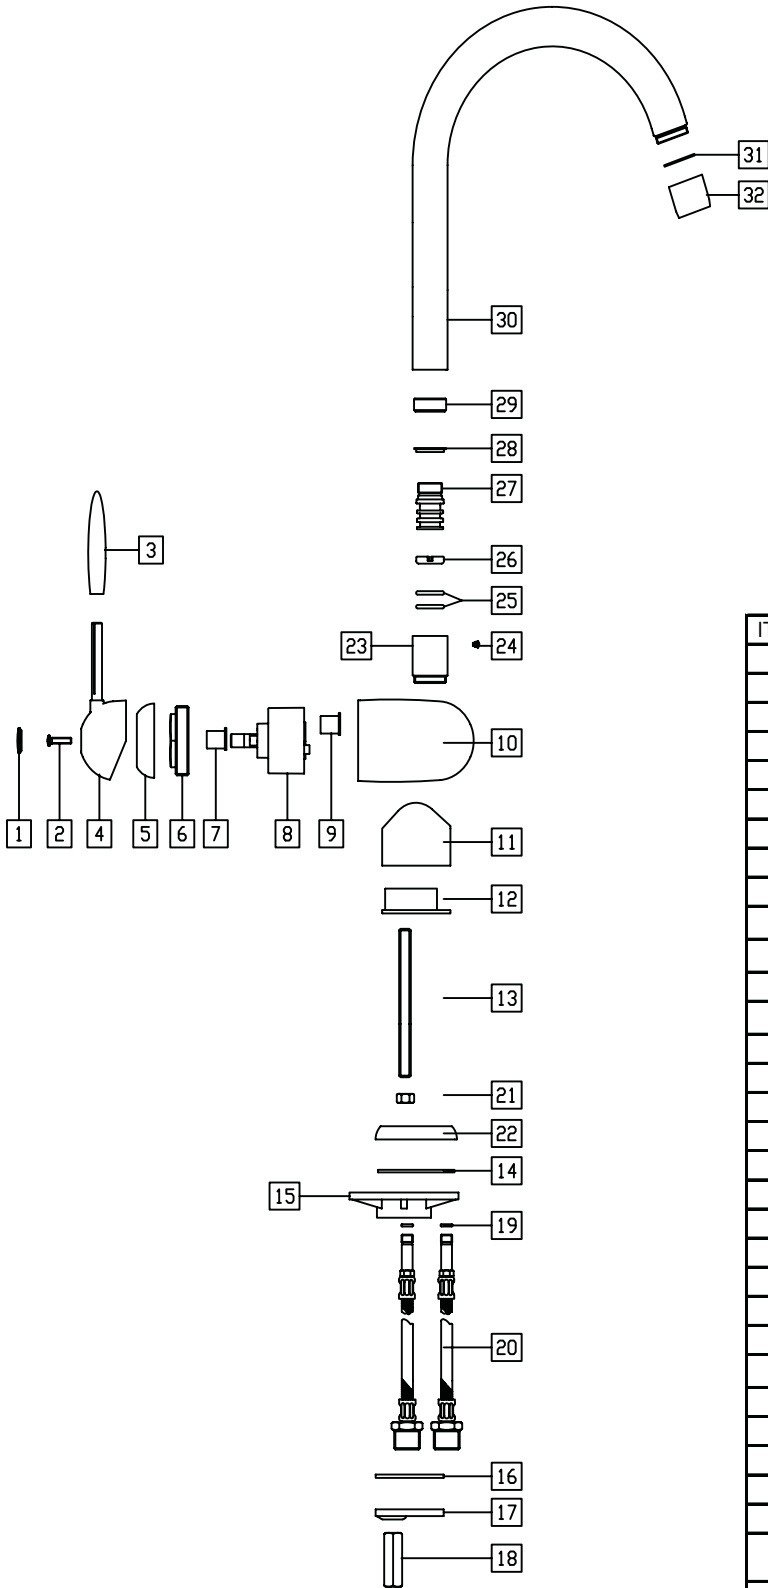

| ITEM | PART | DESCRIPTION |
|------|--------------------------|---|
| 1 | | |
| 2 | A55963R - CHROME | LEVER HANDLE ASSEMBLY |
| 3 | A55964R - BRUSHED NICKEL | |
| 4 | A55965R - BRUSHED CHROME | |
| 5 | | |
| 6 | N/A | N/A |
| 7 | | |
| 8 | A56106R | CARTRIDGE |
| 9 | A56117R | GREEN WASHER |
| 10 | | |
| 11 | N/A | N/A |
| 12 | | |
| 13 | | |
| 14 | | |
| 15 | A56026R | HARDWARE |
| 16 | | |
| 17 | | |
| 18 | | |
| 19 | A56095R | SUPPLY HOSES (1 PAIR, 1 RED & 1 BLUE) |
| 20 | | |
| 21 | N/A | N/A |
| 22 | | |
| 23 | | |
| 24 | | |
| 25 | | |
| 26 | A56000R - CHROME | SPOUT ASSEMBLY (ALSO INCLUDES SPOUT ASSEMBLY) |
| 27 | A56001R - BRUSHED NICKEL | |
| 28 | A56002R - BRUSHED CHROME | |
| 29 | | |
| 30 | | |
| 31 | A56040R - CHROME | AERATOR ASSEMBLY |
| 32 | A56041R - BRUSHED NICKEL | |
| | A56042R - BRUSHED CHROME | |